


Media Converter 10/100M with 1 Ethernet port and 1 155M Fiber port  
PN: AE-100A

## Overview


The AE-100A is a 10/100Mbps adaptive fast Ethernet Fiber Switch. It has one 10/100Mbps Ethernet port and one 155Mbps fiber port. It extends the transmission distance from 100m to 120km via copper cables. There are also many other advantages such as isolation protection, good data security, working stability and easy maintenance.

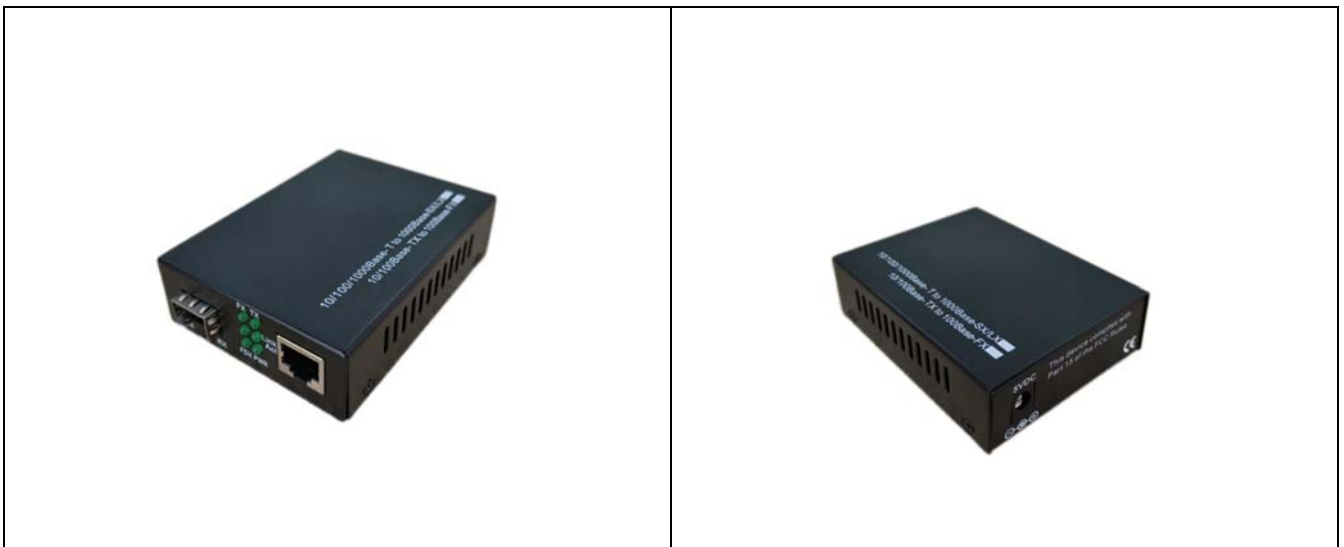


## Features

- Support the switch between 10/100Base-T and 100Base-SX/LX
- 1\*155Mbps full duplex fiber port, 1\*10/100M adaptive Ethernet port
- Support 10/100M rate, support MDI/MDI-X adaptive, support full/half duplex adaptive
- Each port has the complete LED Indicator light
- Support IEEE802.1d Spanning Tree
- Support high performance QoS function on each port
- SFP slot
- Support 2K bytes Jumbo Packet
- Low time delay, data isolation function
- Require no configuration and will instantly operate as soon as you power it up
- Small volume
- Low power consumption chip with heat sink built in to ensure longtime efficient operation

## Dimension

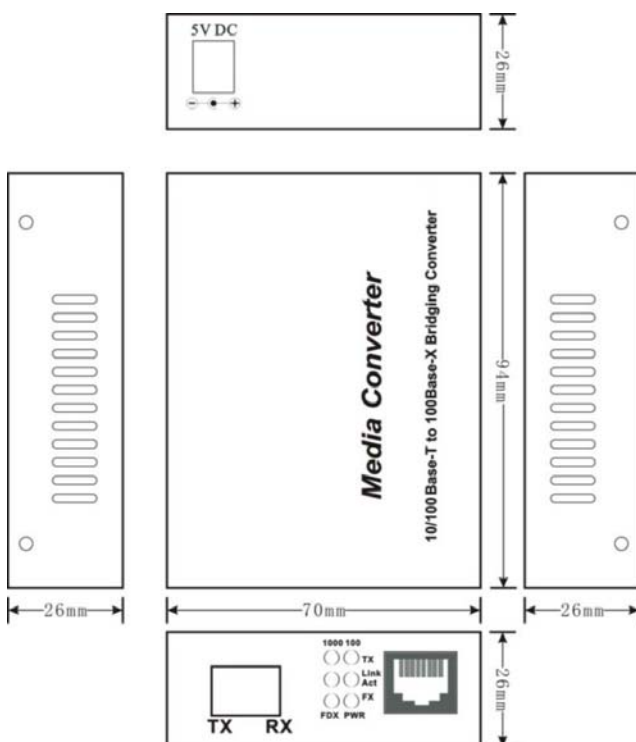

## Application

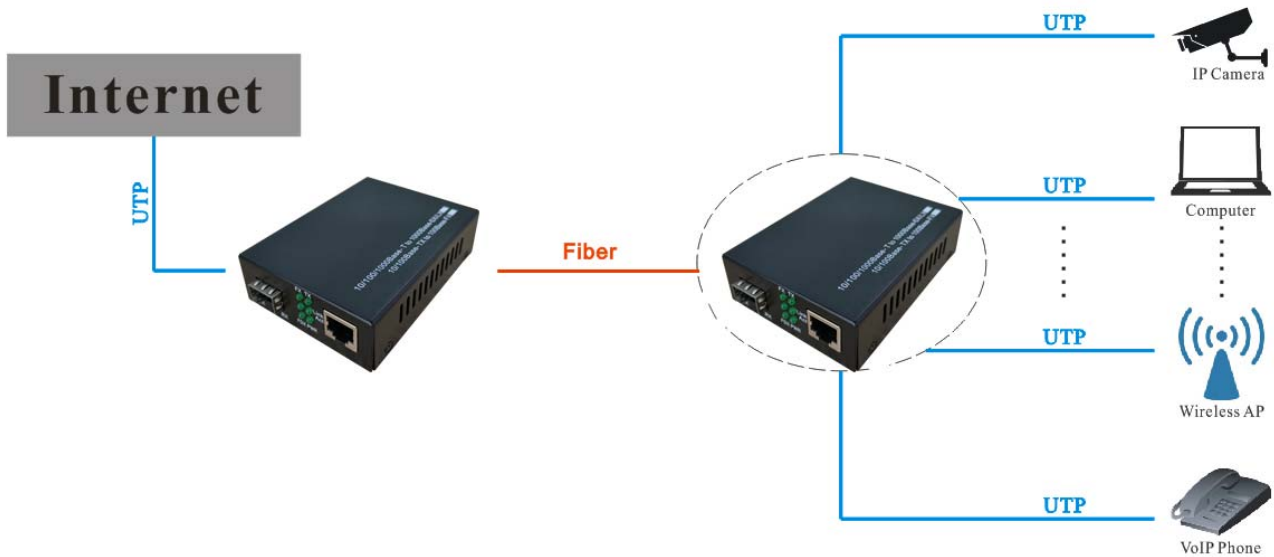

## Specification

Standards	IEEE802.3 10Base-T IEEE802.3u 100Base-TX/FX IEEE802.3ab 1000Base-T IEEE802.3z 1000Base-SX/LX	IEEE802.3x Flow control IEEE802.1p QoS IEEE802.1d Spanning Tree IEEE802.1q VLAN
Certifications	CCC, CE, FCC, RoHS	
Ethernet Port	<ul style="list-style-type: none"> <li>➤ Connector: RJ45</li> <li>➤ Data Rate: 10/100M</li> <li>➤ Distance: 100m</li> <li>➤ UTP Type: UTP-5E or higher level</li> </ul>	
Fiber Port	<ul style="list-style-type: none"> <li>➤ Connector: SFP slot</li> <li>➤ Data Rate: 155Mbps</li> <li>➤ Distance: 550m ~ 100km</li> </ul>	
Performance	<ul style="list-style-type: none"> <li>➤ Processing Type: Store and Forward</li> <li>➤ MAC Table Size: 2K</li> <li>➤ Buffer Space: 1Mbit</li> <li>➤ Maximum packet length: 2K</li> <li>➤ Back bandwidth: 0.4G</li> </ul>	

	<ul style="list-style-type: none"> <li>➤ Time Delay: &lt; 20μs</li> </ul>
Power	<ul style="list-style-type: none"> <li>➤ Power type: external power supply</li> <li>➤ Input Voltage: AC100V ~ 240V 50/60Hz</li> <li>➤ Connector: DC Socket</li> <li>➤ Working Voltage: 5V</li> <li>➤ Power Consumption: 0.75W ~ 3W</li> </ul>
Environment	<ul style="list-style-type: none"> <li>➤ Storage Temperature: -40~70℃</li> <li>➤ Operating Temperature: -10~55℃</li> <li>➤ Relative Humidity: 5-95% ( no condensation)</li> </ul>
Warranty	1 year
Physical Characteristics	<ul style="list-style-type: none"> <li>➤ Dimension: 94×70×26mm(external),140×110×29mm(internal)</li> <li>➤ Weight: 0.35kg(internal),0.35kg(external)</li> <li>➤ Color: Metal, Black</li> </ul>

## Order information

AE-100A

Media Converter 10/100Base-Tx to 100Base-LX with SFP Port

**Note:** 1.Power supply provided by user or order additionally.  
2.SFP slot connector as default.