

## **100GBASE-BX40 QSFP28 BIDI 40KM Transceiver**

**P/N: AE-Q28-BX40-U/AE-Q28-BX40-D**

### **PRODUCT FEATURES**

- Supports 100GBASE-ER BIDI
- Lane signaling rate 106.25Gb/s with PAM4
- Up to 40km transmission on SMF
- EML laser and APD receiver
- 4x25.78Gb/s with NRZ electrical interface (CAUI-4)
- High speed I/O electrical interface
- I2C interface with integrated Digital Diagnostic monitoring
- QSFP28 MSA package with simplex LC connector
- Single +3.3V power supply
- Maximum power consumption 4.5 W
- Operating case temperature: 0 to +70 °C
- Compliant to 802.3cu, SFF-8636&SFF-8679 standard
- Complies with EU Directive 2015/863/EU

### **APPLICATIONS**

- 100GBASE-ER1 BIDI

## I. Absolute Maximum Ratings

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Storage Temperature	T <sub>s</sub>	-40	-	+85	°C	
Supply Voltage	V <sub>CC</sub>	-0.5	-	+4.0	V	
Operating Relative Humidity	RH	-	-	+85	%	

## II. Recommended Operating Conditions

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Operating Case Temperature	T <sub>C</sub>	0	-	+70	°C	
Power Supply Voltage	V <sub>CC</sub>	3.13	3.3	3.47	V	
Power Supply Current	I <sub>CC</sub>	-	-	1.3	A	
Maximum Power Dissipation	P <sub>D</sub>	-	-	4.5	W	
Data Rate(optical)	DR <sub>o</sub>	-	106.25	-	Gb/s	
Transmission Distance	TD	-	-	40	km	Over SMF

## III. Optical and Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
<b>Transmitter</b>						
Center Wavelength	CW	1304.06	1304.58	1305.1	nm	
		1308.61	1309.14	1309.66	nm	
Average Launch Power	P <sub>TX</sub>	1.7	-	7.1	dBm	1
Outer Optical Modulation Amplitude	OMA	4.5	-	7.9	dBm	TDECQ < 1.4
		3.3+TDECQ	-			TDECQ > 1.4
Transmitter and dispersion eye closure for PAM4 (TDECQ) (max)	TDECQ	-	-	3.9	dBm	
TDECQ-TECQ		-	-	2.7	dB	
Average Output Power (Laser Turn off)	P <sub>OUT-OFF</sub>	-	-	-15	dBm	
Side Mode Suppression Ratio	SMSR	30	-	-	dB	
Extinction Ratio	ER	6	-	-	dB	
Transmitter reflectance	T <sub>ref</sub>	-	-	-26	dB	
Optical Return Loss Tolerance	ORLT	-	-	15	dB	
<b>Receiver</b>						
Center Wavelength	CW	1308.61	1309.14	1309.66	nm	
		1304.06	1304.58	1305.1	nm	
Damage threshold	P <sub>damage</sub>	-2.4	-	-	dBm	2
Average Rx Power	P <sub>RX</sub>	-16.0	-	-3.4	dBm	3

BIDI QSFP28 100G 40KM

Receive power _OMAouter	P <sub>OMA</sub>	-	-	-2.6	dBm	
Receiver sensitivity _OMAouter	SEN <sub>_OMA</sub>	-	-	-13.8	dBm	4
Stressed receiver sensitivity _OMAouter	SRS	-	-	-11.3	dBm	5
Los Assert	LosA	-26	-	-	dBm	
Los De-Assert	LosDA	-	-	-17	dBm	
Los Hysteresis	LosH	0.5	-	-	dB	

Notes:

1. The optical power is launched into SMF.
2. The receiver shall be able to tolerate, without damage, continuous exposure to an optical input signal having this average power level. The receiver does not have to operate correctly at this input power.
3. Average receive power, each lane (min) is informative and not the principal indicator of signal strength.
4. Measured with conformance test signal at TP3 using the test pattern PRBS31Q or scrambled idle for stressed receiver sensitivity for the BER= 2.4x10<sup>-4</sup>.
5. Measured with conformance test signal at TP3 (see3.11) for the BER specified in IEEE Std 802.3cd clause 140.1.1.

## IV. Electrical Characteristics

High-Speed Signal: Compliant to CAUI-4 (IEEE 802.3cu)


Low-Speed Signal: Compliant to SFF-8679.

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
<b>Transmitter (Module Input)</b>						
Input Differential Impedance	R <sub>in</sub>	-	100	-	Ohm	
Differential Data Input Amplitude	V <sub>IN,P-P</sub>	80	-	900	mVpp	
Differential termination mismatch (max)	D-mismatch	-	-	10	%	
DC common-mode input voltage		-0.3	-	2.8	V	
Transition time(20%~80%)	Tr Tf	10	-	-	ps	
LPMode, Reset and ModSelL / Tx dis	V <sub>IL</sub>	-0.3	-	0.8	V	
LPMode, Reset and ModSelL / Tx dis	V <sub>IH</sub>	2.0	-	V <sub>CC</sub> +0.3	V	
<b>Receiver (Module Output)</b>						
Output Differential Impedance	R <sub>out</sub>	-	100	-	Ohm	
Differential Data Output Amplitude	V <sub>OUT,P-P</sub>	-	-	900	mVpp	
Differential termination mismatch (max)	D-mismatch	-	-	10	%	
Transition time, 20% to 80%	Tr Tf	12	-	-	ps	
ModPrsL and IntL/ Rx los	V <sub>OL</sub>	0	-	0.4	V	
ModPrsL and IntL/ Rx los	V <sub>OH</sub>	V <sub>CC</sub> -0.5	-	V <sub>CC</sub> +0.3	V	

## V. Digital Diagnostics

Parameter	Range	Accuracy	Unit	Calibration
Temperature	0 to 70	±3	°C	Internal
Voltage	0 to Vcc	0.1	V	Internal
Tx Bias Current	0 to 100	±10%	mA	Internal
Tx Output Power	1.7 to 7.1	±3	dB	Internal
Rx Input Power	-16.0 to -3.4	±3	dB	Internal

## VI. Pin Diagram

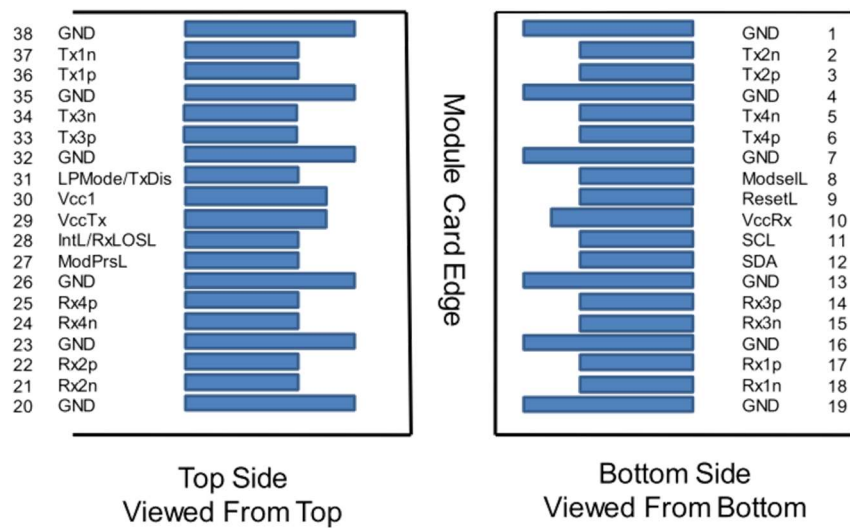

## VII. Pin Definitions

PIN	Logic	Symbol	Description	Plug Seq.	Notes
1		GND	Ground	1	1
2	CML-I	Tx2n	Transmitter Inverted Data Input	3	
3	CML-I	Tx2p	Transmitter Non-Inverted Data output	3	
4		GND	Ground	1	1
5		NC		3	
6		NC		3	
7		GND	Ground	1	1
8	LVTLL-I	ModSelL	Module Select	3	
9	LVTLL-I	ResetL	Module Reset	3	
10		VccRx	+ 3.3V Power Supply Receiver	2	2
11	LVC MOS-I/O	SCL	2-Wire Serial Interface Clock	3	
12	LVC MOS-I/O	SDA	2-Wire Serial Interface Data	3	
13		GND	Ground	1	


BIDI QSFP28 100G 40KM

14		NC		3	
15		NC		3	
16		GND	Ground	1	1
17	CML-O	Rx1p	Receiver Non-Inverted Data Output	3	
18	CML-O	Rx1n	Receiver Inverted Data Output	3	
19		GND	Ground	1	1
20		GND	Ground	1	1
21	CML-O	Rx2n	Receiver Inverted Data Output	3	
22	CML-O	Rx2p	Receiver Non-Inverted Data Output	3	
23		GND	Ground	1	1
24		NC		3	
25		NC		3	
26		GND	Ground	1	1
27	LVTTL-O	ModPrsL	Module Present	3	
28	LVTTL-O	IntL	Interrupt	3	
29		VccTx	+3.3 V Power Supply transmitter	2	2
30		Vcc1	+3.3 V Power Supply	2	2
31	LVTTL-I	LPMode	Low Power Mode	3	
32		GND	Ground	1	1
33		NC		3	
34		NC		3	
35		GND	Ground	1	1
36	CML-I	Tx1p	Transmitter Non-Inverted Data Input	3	
37	CML-I	Tx1n	Transmitter Inverted Data Output	3	
38		GND	Ground	1	1

Notes:

- GND is the symbol for signal and supply (power) common for the QSFP28 module. All are common within the QSFP28 module and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal-common ground plane.
- Vcc Rx, Vcc1 and Vcc Tx are the receiver and transmitter power supplies and shall be applied concurrently. Requirements defined for the host side of the Host Edge Card Connector are listed in MSA. The connector pins are each rated for a maximum current of 1000 mA.

### VIII. Mechanical Diagram

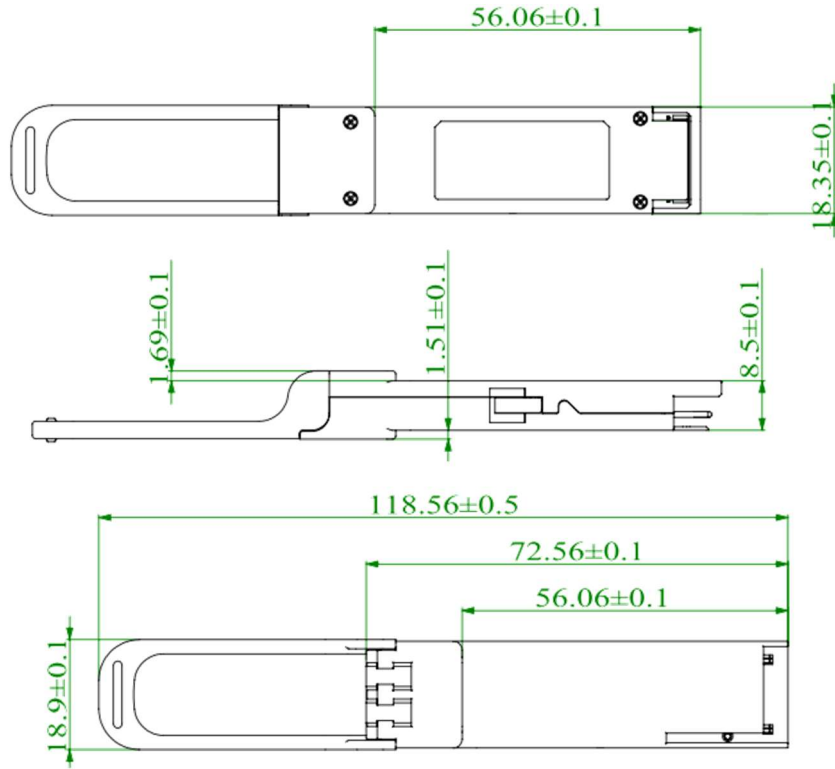

### Ordering Information

Part No.	Data Rate	Laser	Fiber Type	Distance	Optical Interface	Temp	DDMI
AE-Q28-BX40-U	106.25Gbps	Tx1304/Rx1309nm	SMF	40km	LC	0~70C	Y
AE-Q28-BX40-D	106.25Gbps	Tx1309/Rx1304nm	SMF	40km	LC	0~70C	Y